

Lierda[®]

Rev01	2022-03-07		
Rev02	2022-04-07		SIM
Rev03	2022-05-27		
Rev04	2022-09-01		
Rev05	2023-02-13		Logo
			®


Lierda[®]




Lierda®

- 1.
2.
 - 2.1
 - 2.2
- 3.

Lierda[®]

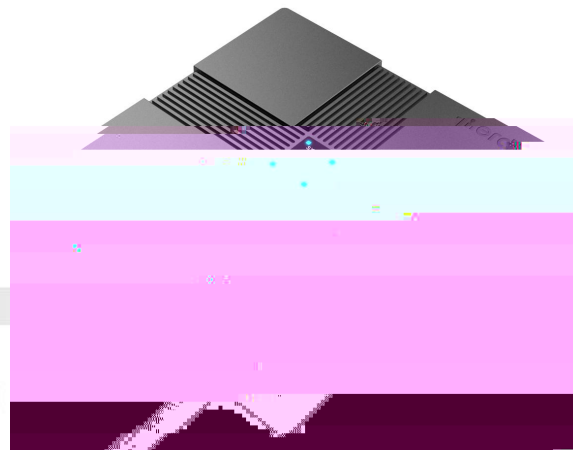

2-1 MX

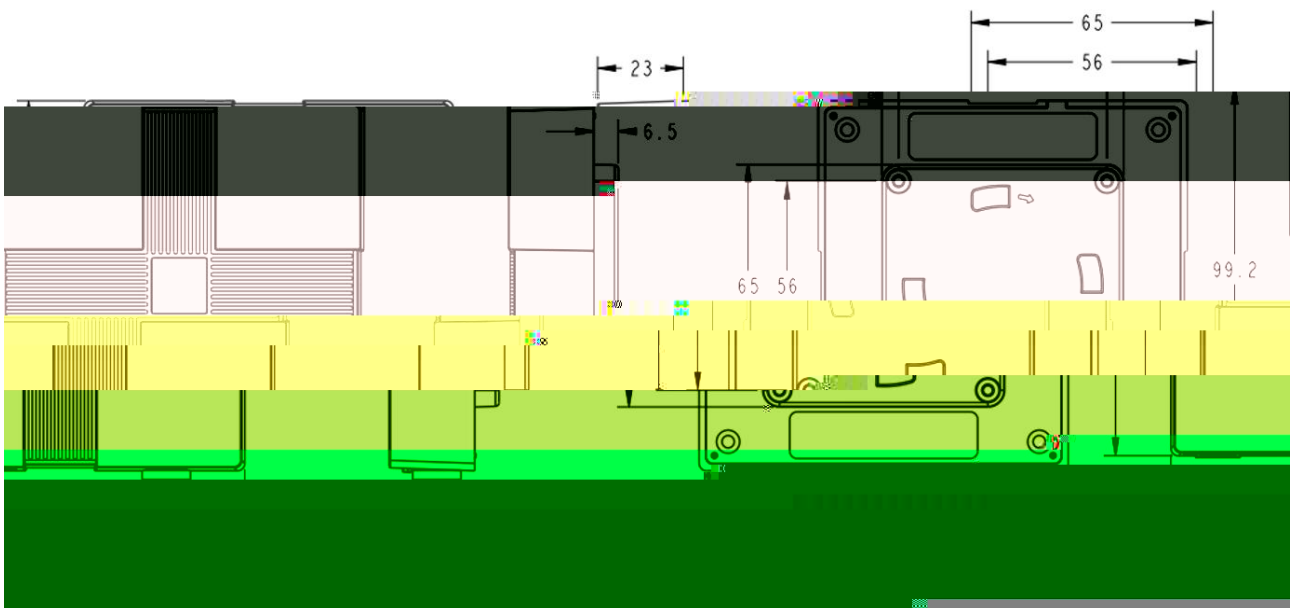

2-2

mm

3-1 MX800 5G

CPU

256M Byte LPDDR3

32M Byte Flash

1 10/100/1000M LAN RJ45

(U)SIM

Nano SIM

ETSI

IMT-2000

Class B(3.0V)

Class C(1.8V)

(U)SIM

16 KV ESD

USB

Type-C

PWR() 5G 4G SYS LED

5G

5G NR 3GPP Release 15 NSA/SA operation Sub-6 GHz

5G NR SA n1/n28/n41/n77/n78/n79

5G NR 4x4 MIMO n1/n41/n77/n78/n79

5G NR NSA n41/n78/n79

LTE

LTE-FDD B1/B2/B3/B5/B7/B8/B20/B28

LTE-TDD B34/B38/B39/B40/B41

LAA -

2 × 2 MIMO B1/B2/B3/B5/B7/B8/B20/B28/B34/B38/B39/B40/B41

UMTS

WCDMA B1/B2/B5/B8

WIFI

802.11 b/g/n

5G SA

DL/UL 2 Gbps / 1 Gbps

5G NSA

DL/UL 2.2 Gbps / 575 Mbps

LTE

DL/UL 600 Mbps / 150 Mbps

5ZX €

DC 9 36V

0.6A 12V

1.3A 12V

0.3A 12V

+ABO 0; • É

99mm h 99mm h 26mm Ä 0.5mm

350g

1 10/100/1000M Z5• Ö

Lierda®

Lierda®