




•
•
•


•
•

		DC 3V CR-1632/BN	/
		≤20mA	/
		Zigbee IEEE802.15.4	/
		50	/
			/
		≤20mm	/
		2.4V±0.2V	/
			/
		L35*W20*H20mm	/
		ABC PC	/
			/
			/
		94-V0	/
		-10~+50	/


		≤ 95RH	/
		-20~+60	/
		0~95%RH	/
	GB/T 17626.2-2006/GB/T 17626.4-2008/GB 16915.2-2012		/
	GB17625.1-2012;GB/T17743-2007;		/
	/		/
	20 /		/
	1		/
	/		/

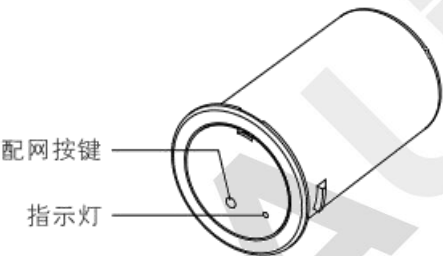

	5s LED
	1s LED LED

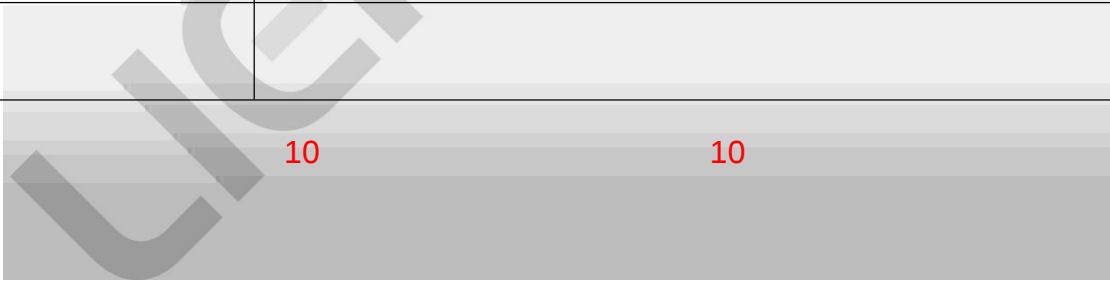

1. V-CUT ±0.5mm

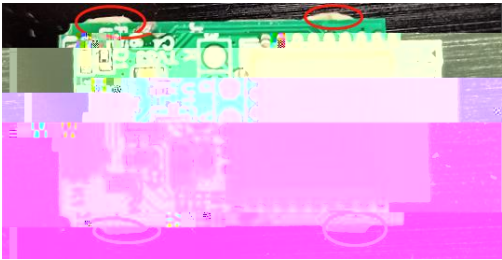



PS

1~5uA $\pm 0.1\mu A$



PS

73*36*90mm



产品介绍

产品系列：LED照明产品

产品尺寸

尺寸：73*36*90mm

使用范围

适用于室内照明

安装方法

1. 将产品安装在天花板上，确保安装牢固。

产品特点

型号	LSDBSHA-ZDB01
功率	3W
电压	AC85-265V
色温	4000K
光束角	30°

注意事项

1. 请勿触摸灯体，以免烫伤。

售后服务

1. 本产品质保三年，非人为损坏免费维修。

常见问题

1. 产品不亮：检查电源是否接通，灯体是否安装牢固。

联系方式

电话：020-88888888

102*75mm

LIERDALUX®

产品名称：门磁感应器

产品型号：LSDBSHA-ZDB01

产品版本：V01.01

装箱数量：80PCS

出厂日期：2021XXXX

制造商：浙江利尔达客思智能科技有限公司

	ISO9001 2015	
	ISO14001 2015	

1	
2	
3	
4	
5	
6	
7	H ₂ S SO X Cl ₂ HCl
8	

1

2

