



LIERDA SCIENCE & TECHNOLOGY GROUP CO.,LTD

Gdwd Vkhhw



2020 09 28


2020-09-28

1

Rev01

2020-09-28

YCZ@lierda.com

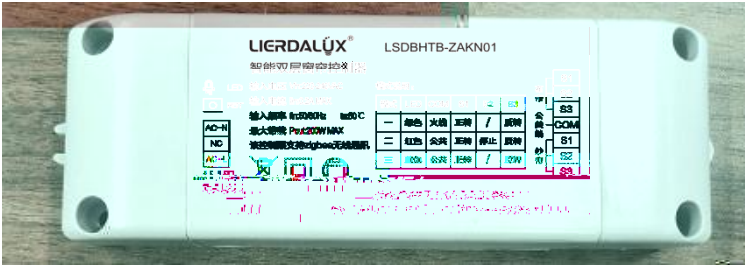

-
-
-
-
-
-
-



-
-
-
-
-
-
-

ZigBee

ZigBee



		220-240VAC	/
		50/60Hz	/
		≤0.3W	/
		3W MAX	6 ON
		20A Max @230VAC	/
		500W@MAX	200W@MAX
		6	230VAC
		S1 S2 S3	/

S1	S2	S3	
		@	220VAC
		≥150	/
		zigbee PRO (IEEE 802.15.4)	/
		50m	/
		128±1mm	/
		46±1mm	/
		29±1mm	/
		PC	/
			/
			/
		94-V0	/
		IP20	/
		0.5-2.5	/
		0.5-1.5	/
		-10~+45	/
		20~90%RH	/
		-40~+75 (6	/
		10~90%RH	/
		86-106KPa	/
		CCC CE	/
		EN55015 EN61000-3-2	/
		EN61000-4-2,3,4,5,6,8,11; EN61547	/
		615x330x330mm(L*W*H)	/
		108PCS/	/
		/	/

模式说明:

模式	LED	COM	S1	S2	S3
二	蓝色	公共	正转	/	反转



■ p p


045; - Z 79-K5<



■

	ISO9001 2015	
	ISO14001 2015	

■



- 1.
- 2.
- 3.
- 4.
- 5.

