


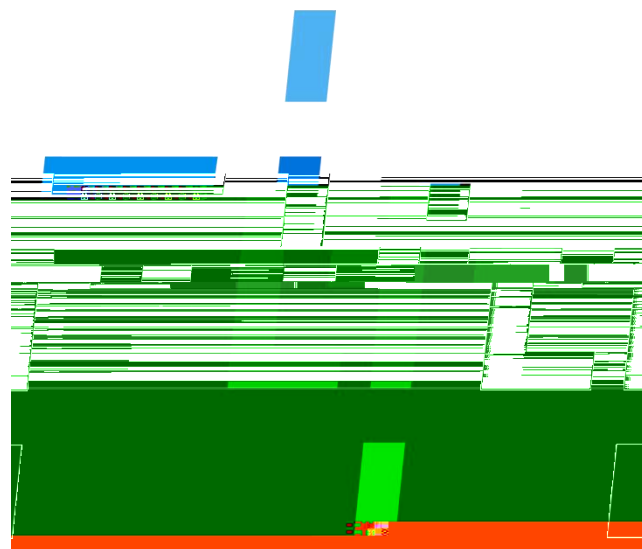


1-1

✓


8c

8c


1


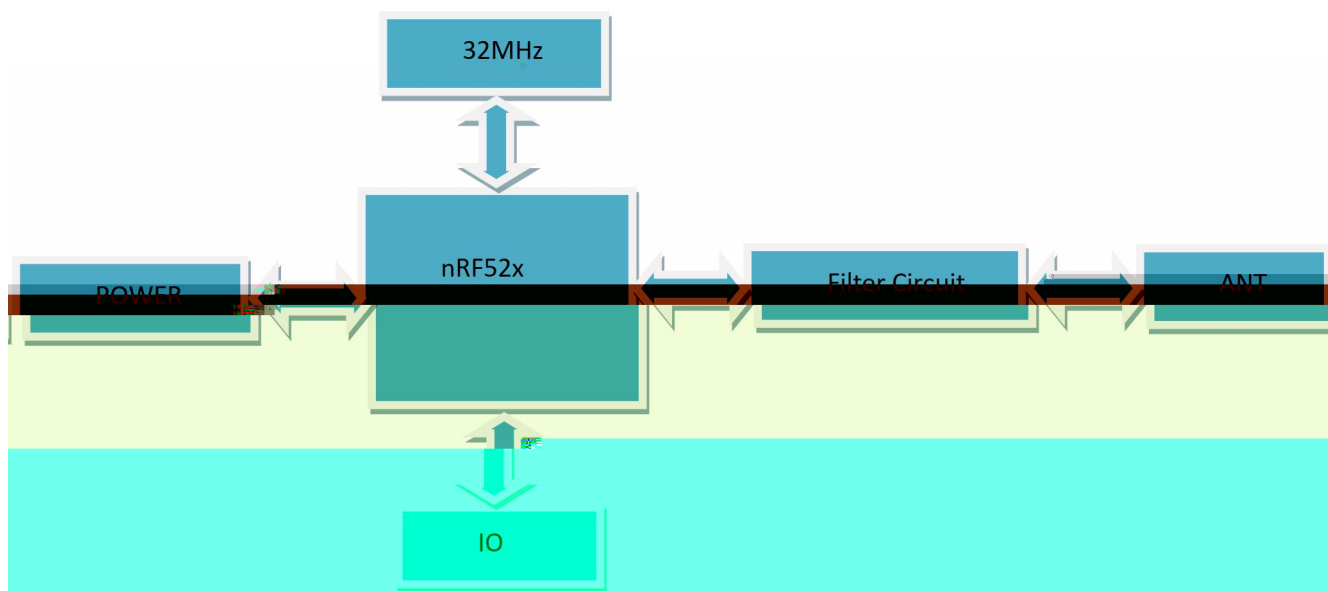


2 SB97

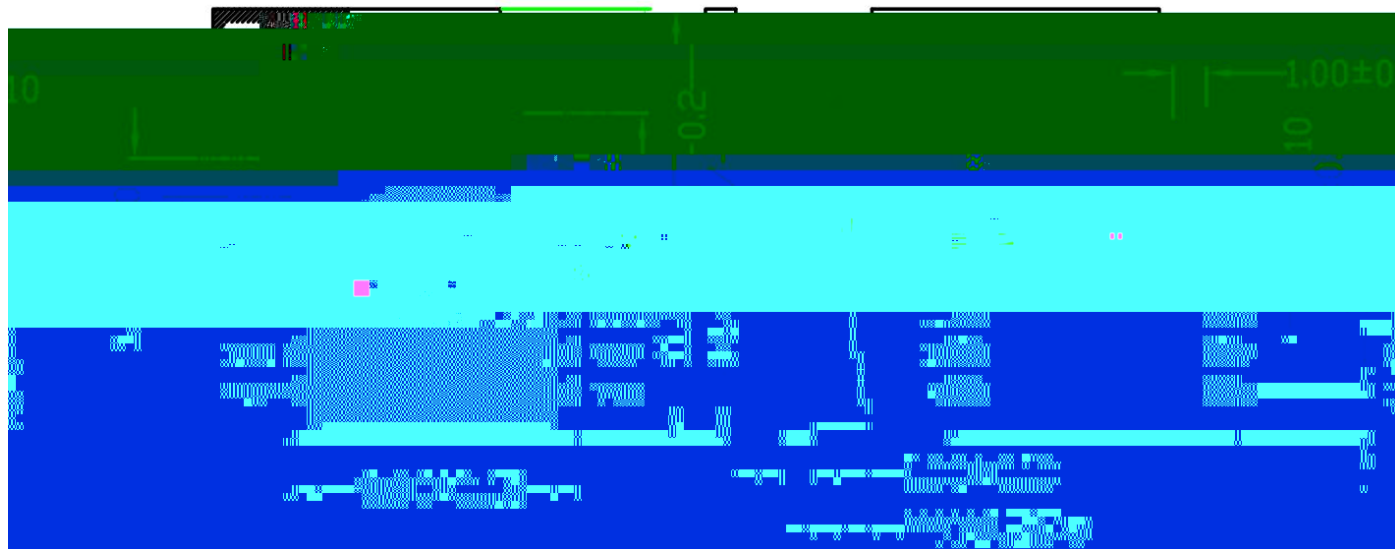

3 SB97

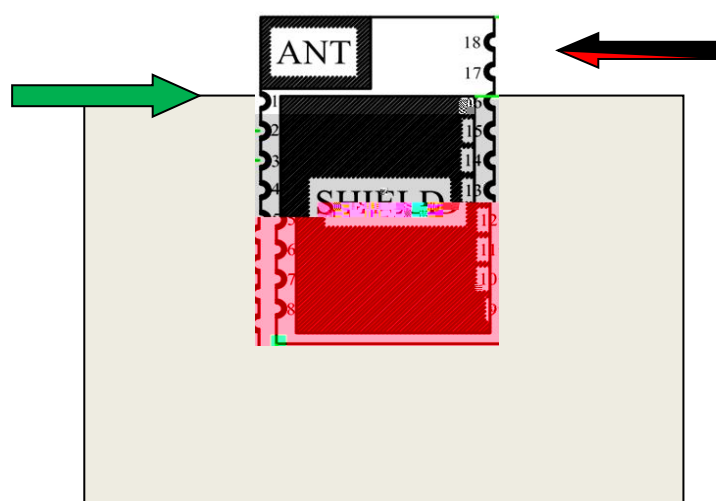

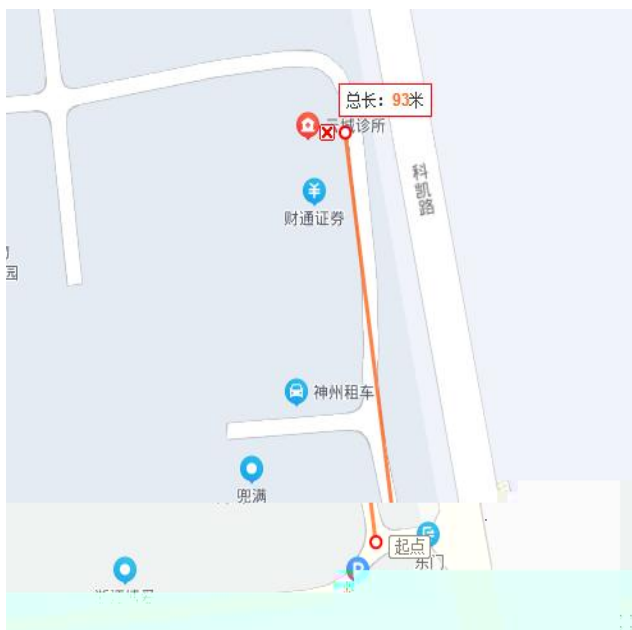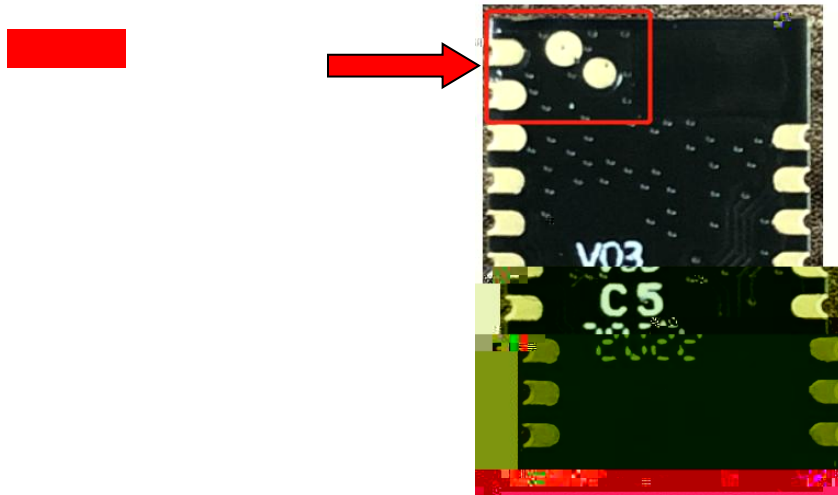



Bit number		31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ID		A																															
Reset		0x00000000																															
ID	Acce Field	Value ID		Value		Description																											
A	RW	LFXODEBOUNCE				LFXO debounce time.																											
		Normal		0		8192 32.768 kHz periods, or 0.25 s. Recommended for normal Operating Temperature conditions.																											
		Extended		1		16384 32.768 kHz periods, or 0.5 s. Recommended for Extended Operating Temperature conditions.																											

为

的

的

		MOQ(PCS)	(PCS)	
		6400	1280	5
		6400	1280	5
		6400	1280	5

